

Features

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available


Product Summary



V_{DS}	30	V
I_D	53	A
$R_{DS(ON)}$ (at $V_{GS}=10V$)	7.4	m Ω
$R_{DS(ON)}$ (at $V_{GS}=4.5V$)	10.7	m Ω

Applications

- High Frequency Point-of-Load, Synchronous Buck Converter
- Networking DC-DC Power System
- Load Switch

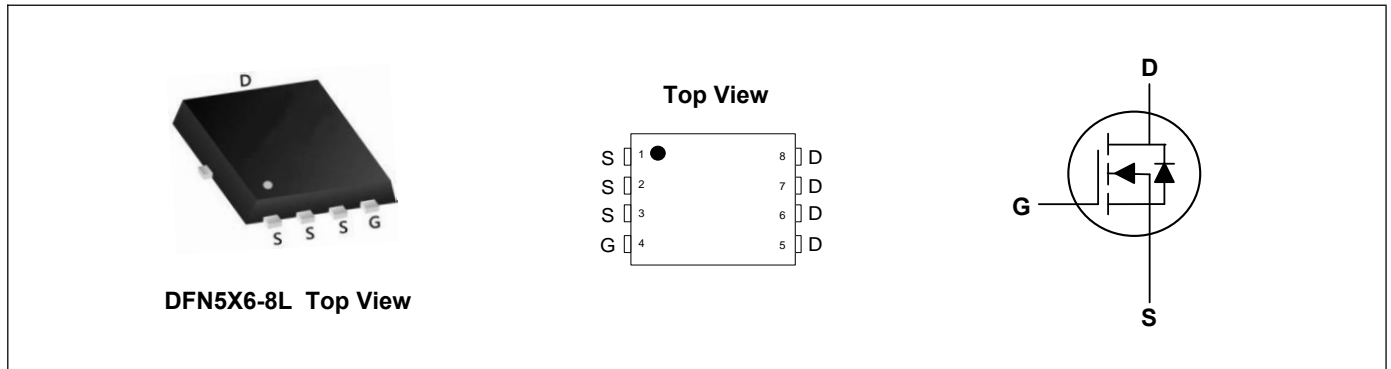

Absolute Maximum Ratings($T_C=25^\circ C$, unless otherwise noted)

Parameter	Symbol	Rating	Units
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ¹	$I_D@T_C=25^\circ C$	53	A
Continuous Drain Current ¹	$I_D@T_C=100^\circ C$	33	A
Pulsed Drain Current ²	I_{DM}	71	A
Single Pulse Avalanche Energy ³	EAS	22	mJ
Avalanche Current	I_{AS}	21	A
Total Power Dissipation ⁴	$P_D@T_C=25^\circ C$	32	W
Total Power Dissipation ⁴	$P_D@T_C=100^\circ C$	13	W
Storage Temperature Range	T_{STG}	-55 to 150	$^\circ C$
Operating Junction Temperature Range	T_J	-55 to 150	$^\circ C$

Thermal Characteristics

Parameter	Symbol	Typ	Max	Unit
Thermal Resistance Junction-Ambient ¹	$R_{\theta JA}$	---	98	$^\circ C/W$
Thermal Resistance Junction-Case ¹	$R_{\theta JC}$	---	3.9	$^\circ C/W$

Electrical Characteristics (T_J=25°C, unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250uA	30	---	---	V
Static Drain-Source On-Resistance ²	R _{DS(ON)}	V _{GS} =10V, I _D =8A	---	6.2	7.4	mΩ
		V _{GS} =4.5V, I _D =6A	---	8.2	10.7	mΩ
Gate Threshold Voltage	V _{GS(th)}	V _{GS} =V _{DS} , I _D =250uA	1.1	1.6	2.1	V
Drain-Source Leakage Current	I _{DSS}	V _{DS} =24V, V _{GS} =0V, T _J =25°C	---	---	1	uA
Gate-Source Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	---	---	±100	nA
Forward Transconductance	g _{fs}	V _{DS} =5V, I _D =8A	---	12	---	S
Gate Resistance	R _g	V _{DS} =0V, V _{GS} =0V, f=1MHz	---	3.5	---	Ω
Total Gate Charge	Q _g	V _{DS} =15V, V _{GS} =10V, I _D =8A	---	31	---	nC
Gate-Source Charge	Q _{gs}		---	1.4	---	
Gate-Drain Charge	Q _{gd}		---	9.3	---	
Turn-On Delay Time	T _{d(on)}	V _{DD} =15V, V _{GS} =10V, R _G =6Ω, I _D =1A	---	6	---	ns
Rise Time	T _r		---	22	---	
Turn-Off Delay Time	T _{d(off)}		---	48	---	
Fall Time	T _f		---	20	---	
Input Capacitance	C _{iss}	V _{DS} =15V, V _{GS} =0V, f=1MHz	---	1094	---	pF
Output Capacitance	C _{oss}		---	147	---	
Reverse Transfer Capacitance	C _{rss}		---	127	---	

Drain-Source Diode Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Diode Forward Voltage ²	V _{SD}	V _{GS} =0V, I _S =1A, T _J =25°C	---	0.7	1.1	V
Reverse Recovery Time	t _{rr}	I _F =1A, di/dt=100A/μs, T _J =25°C	---	14	---	nS
Reverse Recovery Charge	Q _{rr}		---	5.6	---	nC

Note:

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed, pulse width ≤ 300us, duty cycle ≤ 2%
- 3.The EAS data shows Max. rating. The test condition is V_{DD}=25V, V_{GS}=10V, L=0.1mH
- 4.The power dissipation is limited by 150°C junction temperature

Typical Characteristics

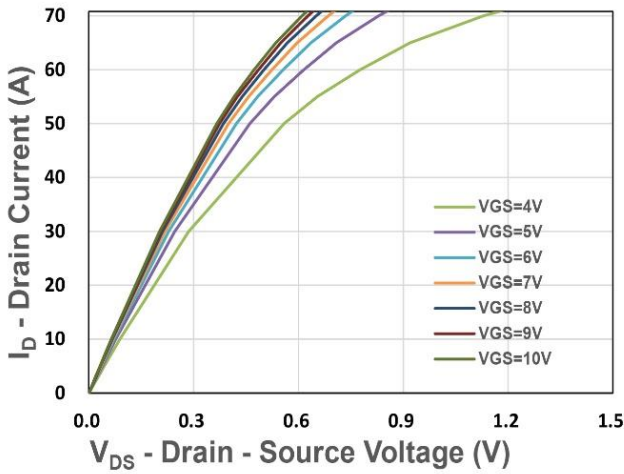


Figure 1. Output Characteristics

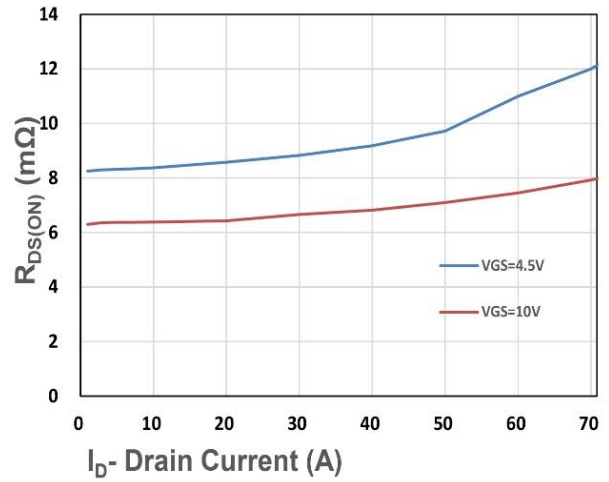


Figure 2. On-Resistance vs. ID

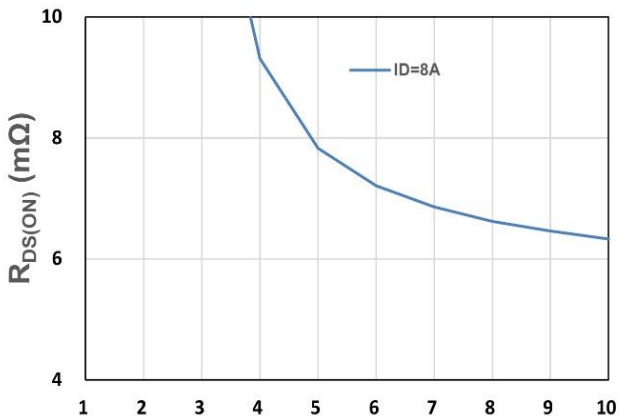


Figure 3. On-Resistance vs. VGS

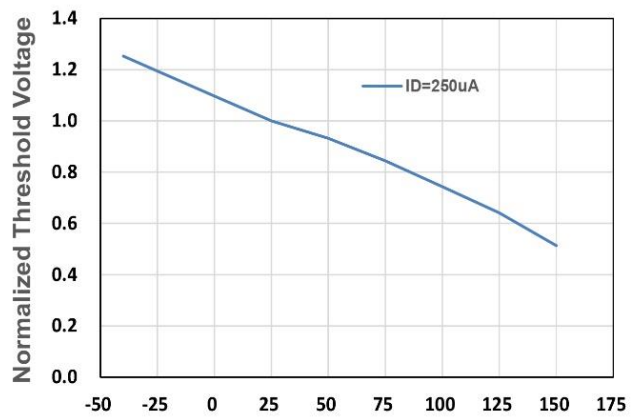


Figure 4. Gate Threshold Voltage

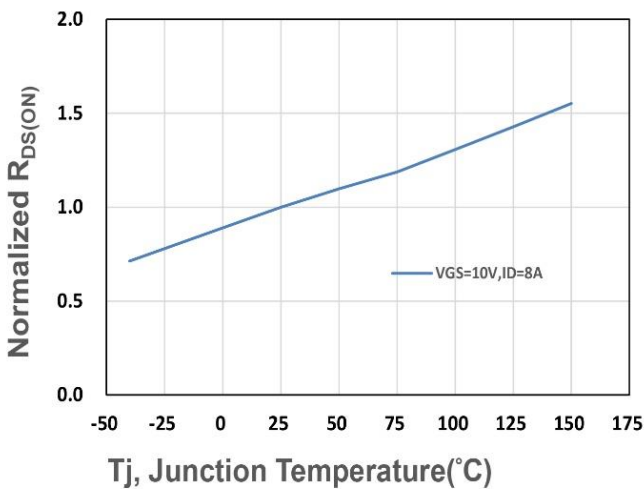


Figure 5. Drain-Source On Resistance



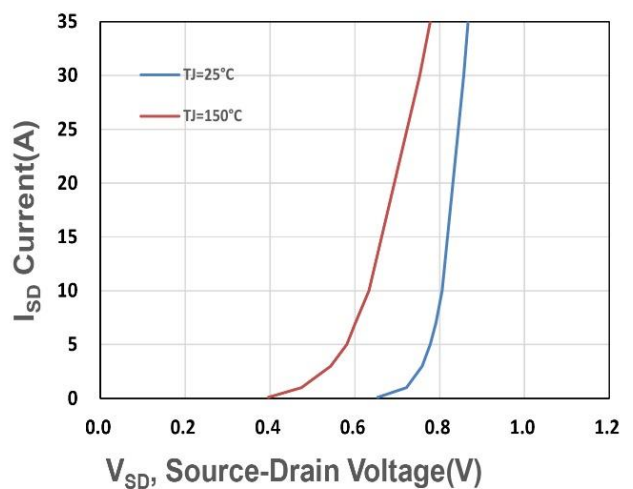


Figure 6. Source-Drain Diode Forward

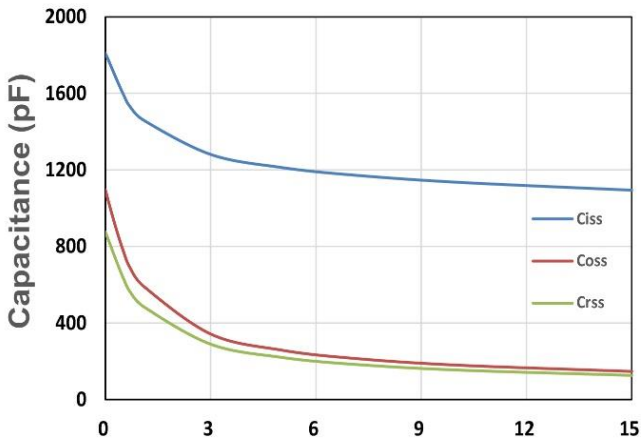


V_{DS} - Drain - Source Voltage (V)

Figure 7. Capacitance

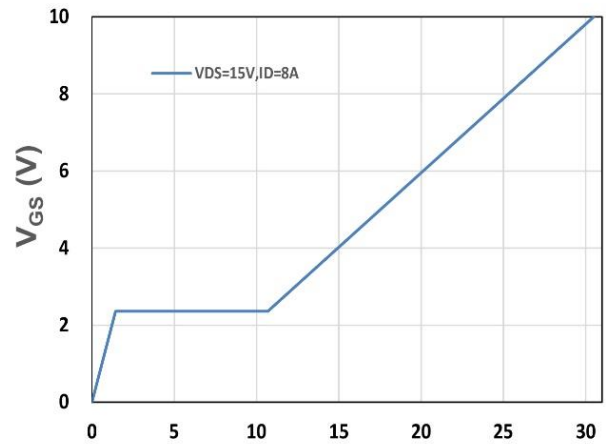


Q_g , Total Gate Charge (nC)

Figure 8. Gate Charge Characteristics

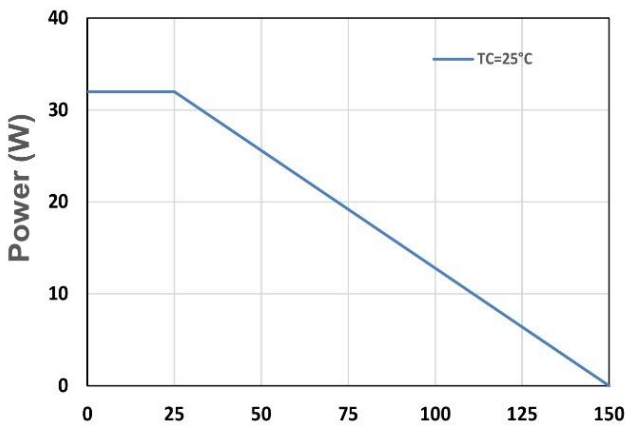


T_j - Junction Temperature ($^{\circ}C$)

Figure 9. Power Dissipation

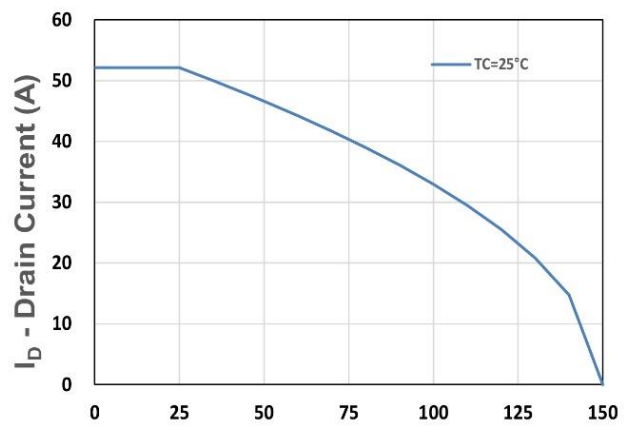


T_j - Junction Temperature ($^{\circ}C$)

Figure 10. Drain Current

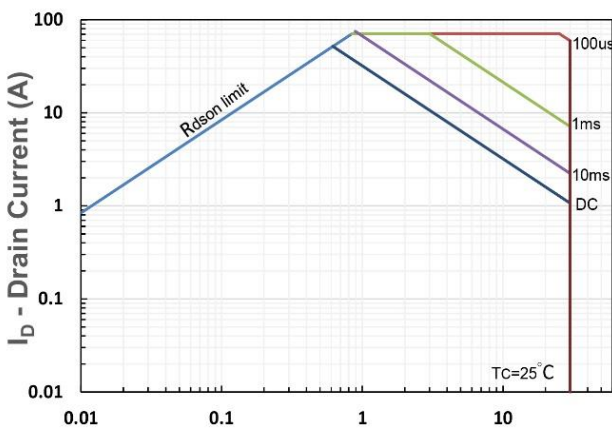

V_{DS} - Drain-Source Voltage (V)


Figure 11. Safe Operating Area

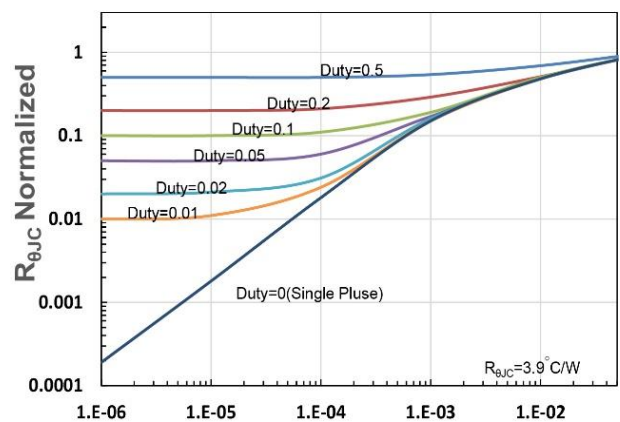

t_1 , Square Wave Pulse Duration(s)

Figure 12. $R_{\theta JC}$ Transient Thermal Impedance

DFN5X6-8L Package Outline Dimensions

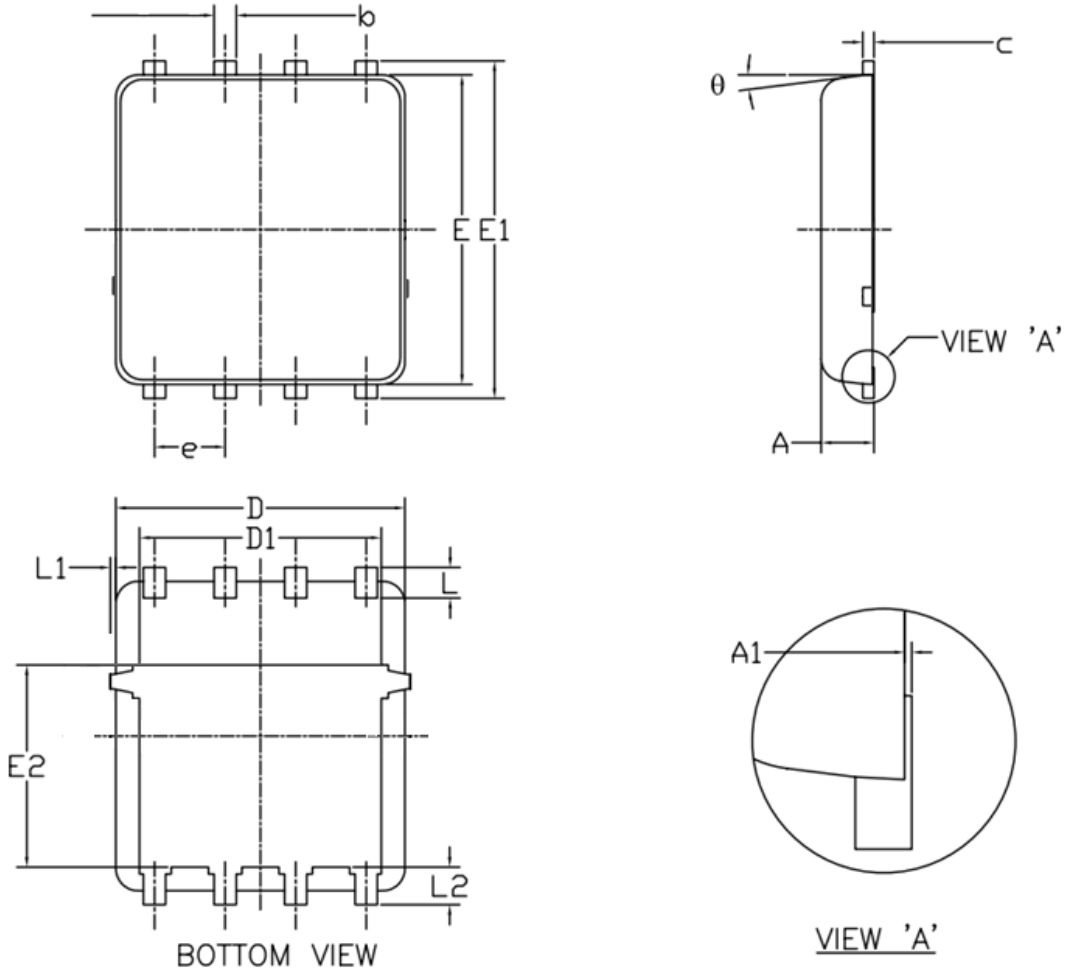

Symbol	Dimensions (unit:mm)			Symbol	Dimensions (unit:mm)		
	Min	Typ	Max		Min	Typ	Max
A	0.90	1.00	1.20	E1	5.90	6.10	6.35
A1	0.00	--	0.05	E2	3.38	3.58	3.92
b	0.30	0.40	0.51	e	1.27 BSC		
c	0.20	0.25	0.33	L	0.51	0.61	0.71
D	4.80	4.90	5.40	L1	--	--	0.15
D1	3.61	4.00	4.25	L2	0.41	0.51	0.61
E	5.65	5.80	6.06	theta	0°	--	12°