



Features



- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available

Product Summary

V_{DS}	100	V
I_D	45	A
$R_{DS(ON)}$ (at $V_{GS}=10V$)	22	mΩ

Applications

- High Frequency Point-of-Load,Synchronous Buck Converter
- Networking DC-DC Power System
- Load Switch



Absolute Maximum Ratings($T_A=25^\circ C$, unless otherwise noted)

Parameter	Symbol	Rating	Units
Drain-Source Voltage	V_{DS}	100	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current, $V_{GS} @ 10V^1$	$I_D @ T_c = 25^\circ C$	45	A
Continuous Drain Current, $V_{GS} @ 10V^1$	$I_D @ T_c = 70^\circ C$	28	A
Pulsed Drain Current ²	I_{DM}	100	A
Single Pulse Avalanche Energy ³	EAS	84	mJ
Avalanche Current	I_{AS}	41	A
Total Power Dissipation ⁴	$P_D @ T_c = 25^\circ C$	90	W
Storage Temperature Range	T_{STG}	-55 to 150	°C
Operating Junction Temperature Range	T_J	-55 to 150	°C

Thermal Characteristics

Parameter	Symbol	Typ	Max	Unit
Thermal Resistance Junction-Ambient ¹	$R_{\theta JA}$	---	62	°C/W
Thermal Resistance Junction-Case ¹	$R_{\theta JC}$	---	1.4	°C/W

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}$, $I_D=250\mu\text{A}$	100	---	---	V
BV_{DSS} Temperature Coefficient	$\triangle \text{BV}_{\text{DSS}}/\triangle T_J$	Reference to 25°C , $I_D=1\text{mA}$	---	0.096	---	$\text{V}/^\circ\text{C}$
Static Drain-Source On-Resistance ²	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}}=10\text{V}$, $I_D=30\text{A}$	---	18	22	$\text{m}\Omega$
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}}=V_{\text{DS}}$, $I_D=250\mu\text{A}$	2.5	---	4.5	V
$V_{\text{GS}(\text{th})}$ Temperature Coefficient	$\triangle V_{\text{GS}(\text{th})}$		---	-5.5	---	$\text{mV}/^\circ\text{C}$
Drain-Source Leakage Current	I_{DSS}	$V_{\text{DS}}=80\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{\text{DS}}=80\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=55^\circ\text{C}$	---	---	5	
Gate-Source Leakage Current	I_{GSS}	$V_{\text{GS}}=\pm 20\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 100	nA
Forward Transconductance	g_{fs}	$V_{\text{DS}}=5\text{V}$, $I_D=30\text{A}$	---	27	---	S
Gate Resistance	R_g	$V_{\text{DS}}=0\text{V}$, $V_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	1.9	3.8	Ω
Total Gate Charge	Q_g	$V_{\text{DS}}=80\text{V}$, $V_{\text{GS}}=10\text{V}$, $I_D=30\text{A}$	---	27.6	---	nC
Gate-Source Charge	Q_{gs}		---	11.4	---	
Gate-Drain Charge	Q_{gd}		---	7.9	---	
Turn-On Delay Time	$T_{\text{d(on)}}$	$V_{\text{DD}}=50\text{V}$, $V_{\text{GS}}=10\text{V}$, $R_G=3.3\Omega$, $I_D=30\text{A}$	---	15.6	---	ns
Rise Time	T_r		---	17.2	---	
Turn-Off Delay Time	$T_{\text{d(off)}}$		---	16.8	---	
Fall Time	T_f		---	9.2	---	
Input Capacitance	C_{iss}	$V_{\text{DS}}=15\text{V}$, $V_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	1890	---	pF
Output Capacitance	C_{oss}		---	268	---	
Reverse Transfer Capacitance	C_{rss}		---	67	---	

Drain-Source Diode Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Continuous Source Current ^{1,5}	I_s	$V_G=V_D=0\text{V}$, Force Current	---	---	45	A
Pulsed Source Current ^{2,5}	I_{SM}		---	---	100	A
Diode Forward Voltage ²	V_{SD}	$V_{\text{GS}}=0\text{V}$, $I_s=1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1.2	V
Reverse Recovery Time	t_{rr}	$I_F=30\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$, $T_J=25^\circ\text{C}$	---	34	---	nS
Reverse Recovery Charge	Q_{rr}		---	47	---	nC

Note:

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- 3.The EAS data shows Max. rating . The test condition is $V_{\text{DD}}=25\text{V}$, $V_{\text{GS}}=10\text{V}$, $L=0.1\text{mH}$
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

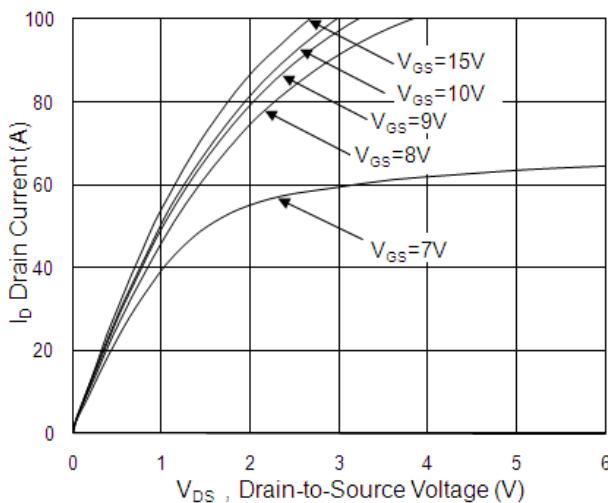


Fig.1 Typical Output Characteristics

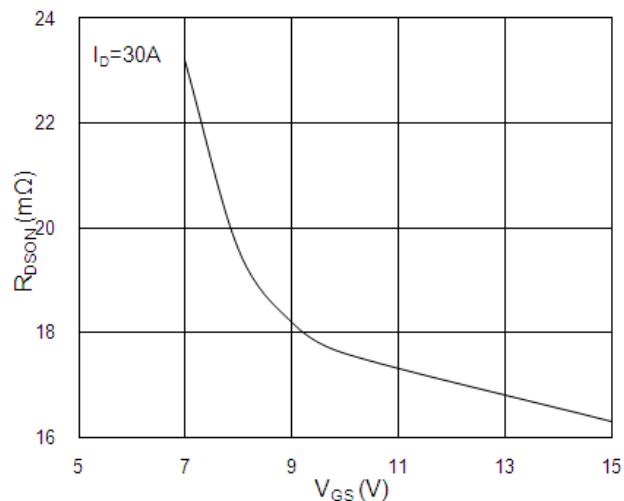


Fig.2 On-Resistance vs G-S Voltage

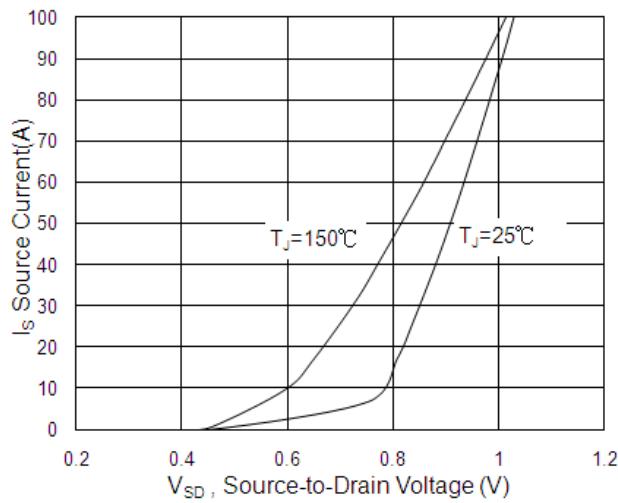


Fig.3 Source Drain Forward Characteristics

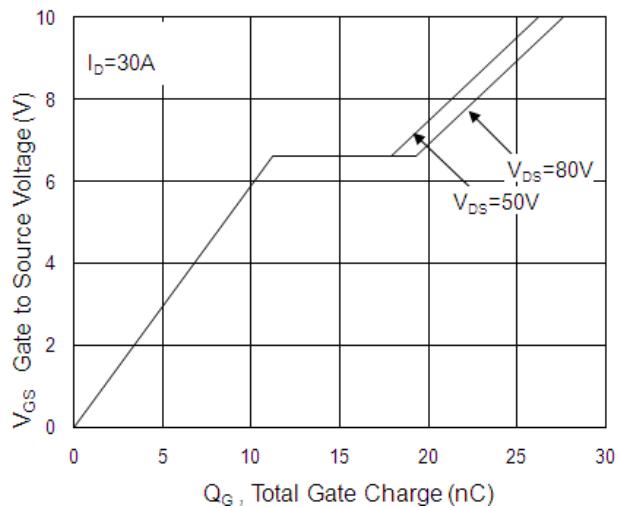


Fig.4 Gate-Charge Characteristics

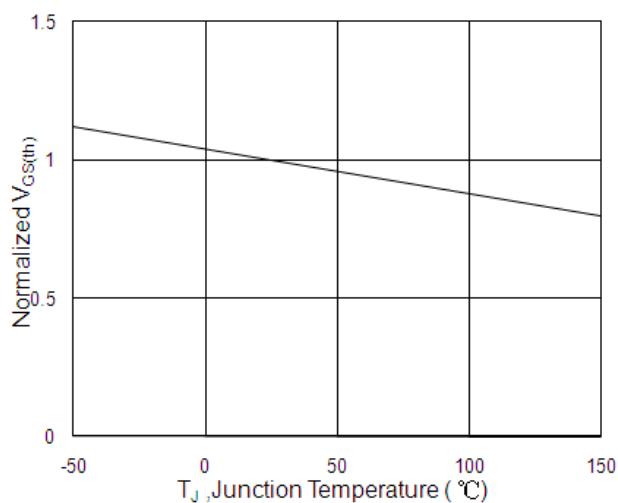


Fig.5 Normalized $V_{GS(th)}$ vs T_J

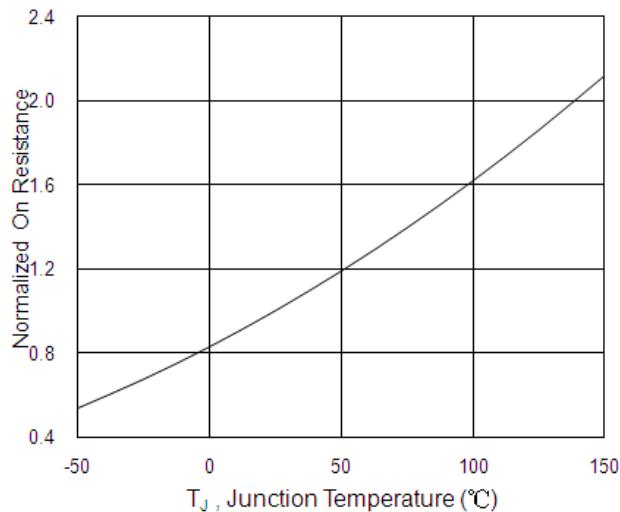
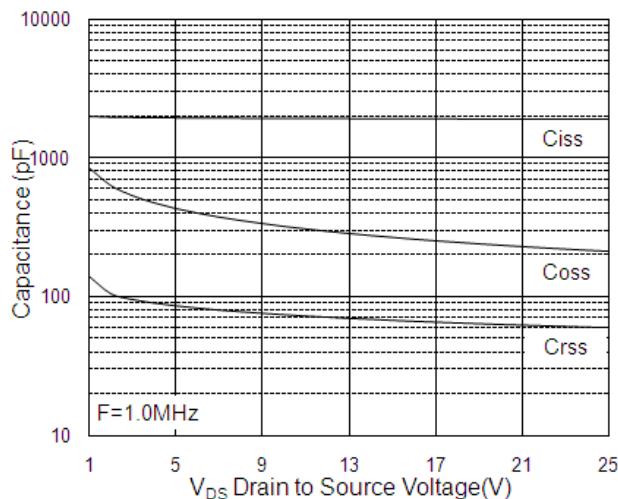
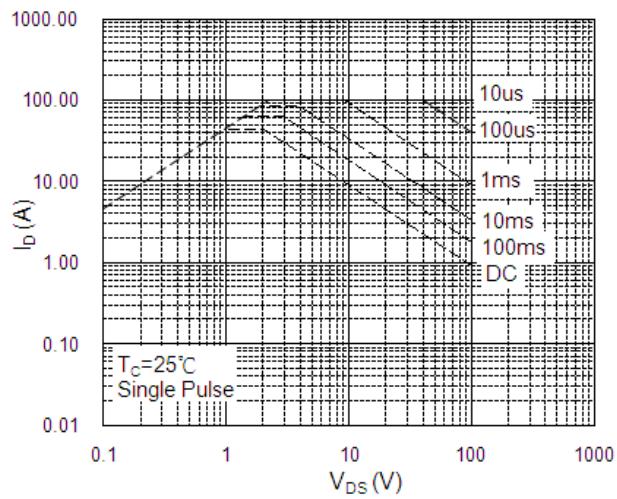
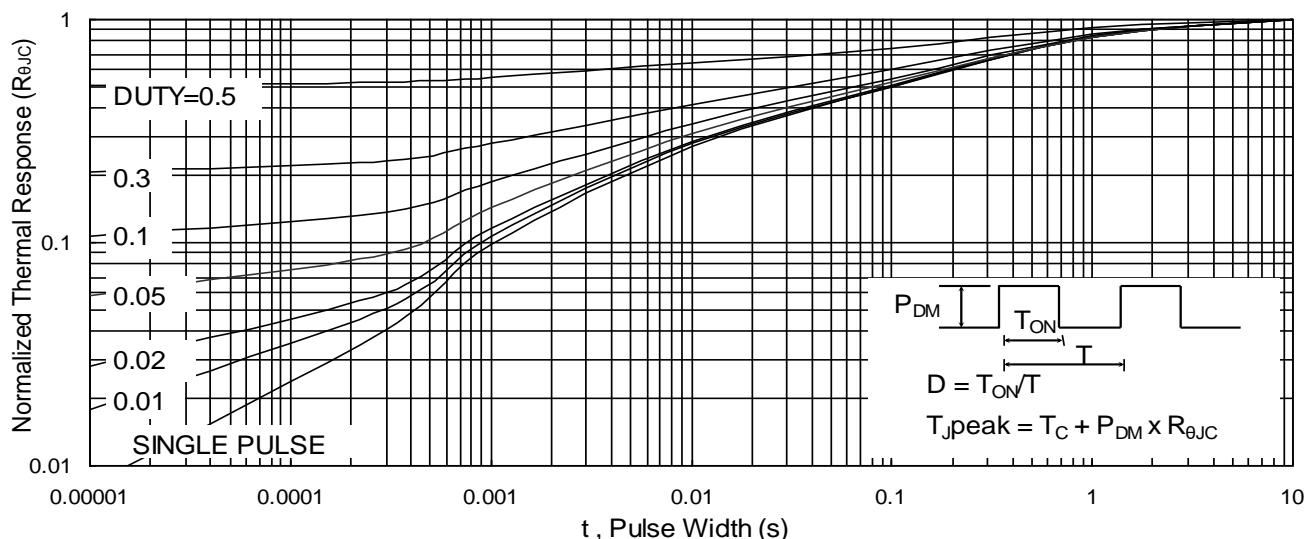
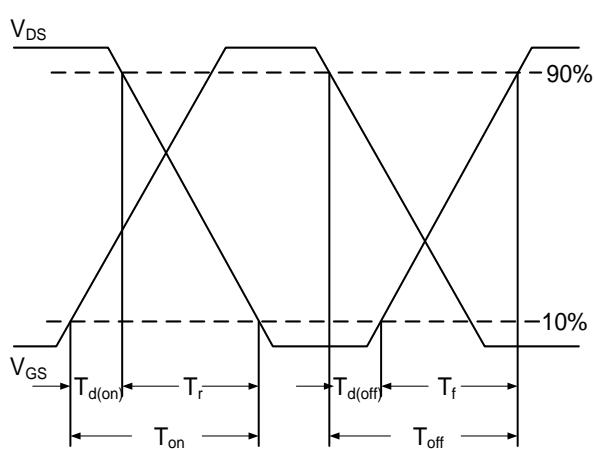
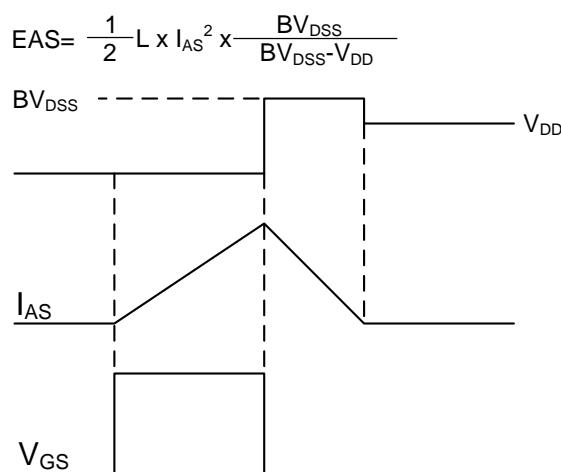
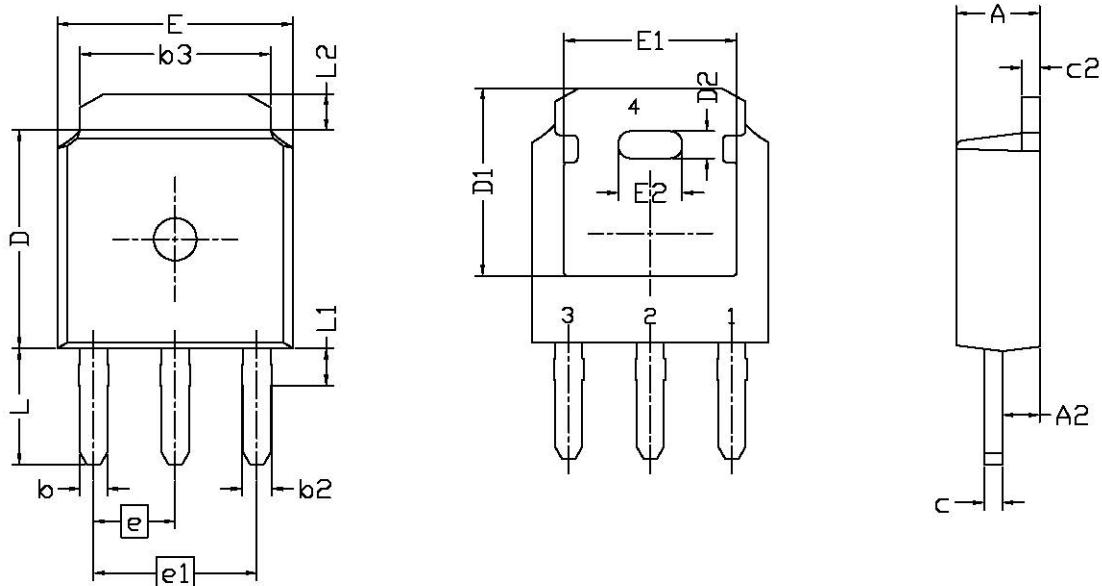


Fig.6 Normalized $R_{DS(on)}$ vs T_J


Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

Fig.10 Switching Time Waveform

Fig.11 Unclamped Inductive Switching Waveform

TO-251 Package Outline Dimensions



Symbol	Dimensions (unit:mm)			Symbol	Dimensions (unit:mm)		
	Min	Typ	Max		Min	Typ	Max
A	2.20	2.30	2.39	A2	0.90	1.00	1.14
b	0.63	0.76	0.85	b2	0.76	0.85	1.05
b3	5.10	5.40	5.60	C	0.46	0.51	0.61
C2	0.46	0.51	0.61	D	5.90	6.10	6.30
D1	5.25 REF			D2	0.508 BSC		
E	6.35	6.55	6.70	E1	5.06 REF		
E2	1.524 BSC			e	2.29 BSC		
e1	4.57 BSC			L	3.70	4.00	4.40
L1	1.15 REF			L2	0.90	1.06	1.20