

### Features

- Low drain-source on-resistance:  $R_{DS(on)}=0.037\Omega(\text{typ})$
- Very Low FOM ( $R_{DS(on)} \times Q_g$ )
- Extremely low switching loss
- 100% avalanche tested
- RoHS compliant


### Key Performance Parameters



Parameter	Value	Unit
$V_{DS} @ T_{j,max}$	600	V
$R_{DS(on),max}$	41	m $\Omega$
$I_D$	72	A
$Q_{g,typ}$	140	nC
$I_{DM}$	216	A

### Applications

- Switch Mode Power Supply (SMPS)
- Uninterruptible Power Supply (UPS)
- Power Factor Correction (PFC)

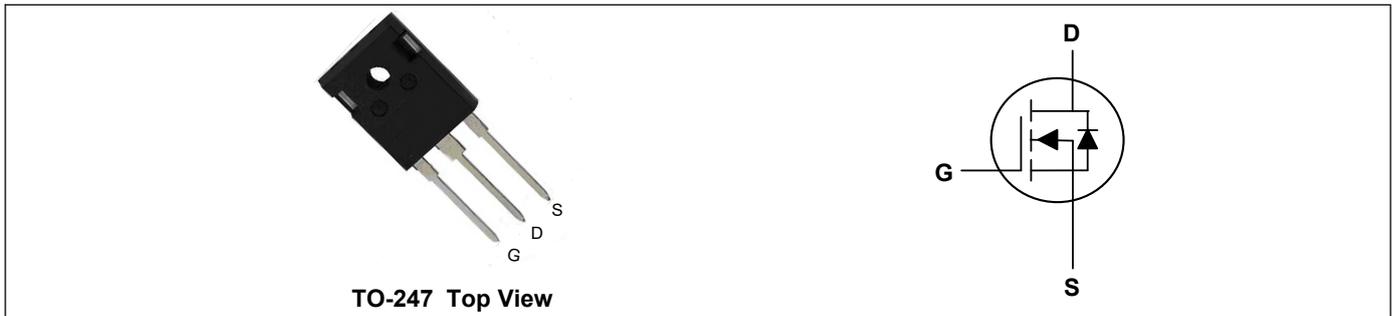

### Absolute Maximum Ratings ( $T_C=25^\circ\text{C}$ , unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DS}$	600	V
Gate-Source Voltage	$V_{GS}$	$\pm 30$	V
Continuous Drain Current <sup>1</sup>	$I_D$	72	A
Pulsed Drain Current <sup>2</sup>	$I_{DM}$	216	A
Single Pulse Avalanche Energy <sup>4</sup>	EAS	2089	mJ
Avalanche Current	$I_{AS}$	15	A
Repetitive Avalanche Energy	$E_{AR}$	3	mJ
MOSFET dv/dt ruggedness, $V_{DS} = 0 \dots 400\text{V}$	dv/dt	50	V/ns
Reverse diode dv/dt <sup>3</sup> $V_{DS}=0 \dots 400\text{V}$ , $I_{SD} \leq I_D$		50	
Total Power Dissipation ( $T_C=25^\circ\text{C}$ )	$P_D$	481	W
Storage Temperature Range	$T_{STG}$	-55 to 150	$^\circ\text{C}$
Operating Junction Temperature Range	$T_J$	-55 to 150	$^\circ\text{C}$

### Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance Junction-Ambient (Max)	$R_{\theta JA}$	62	$^\circ\text{C/W}$
Thermal Resistance Junction-Case (Max)	$R_{\theta JC}$	0.26	$^\circ\text{C/W}$

**Electrical Characteristics ( $T_J=25^\circ\text{C}$ , unless otherwise noted)**

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V, I_D=250\mu A$	600	---	---	V
Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=36A$	---	37	41	m $\Omega$
Gate Threshold Voltage	$V_{GS(th)}$	$V_{GS}=V_{DS}, I_D=1.44mA$	3.0	---	4.0	V
Drain-Source Leakage Current	$I_{DSS}$	$V_{DS}=600V, V_{GS}=0V, T_J=25^\circ\text{C}$	---	---	1	$\mu A$
		$V_{DS}=600V, V_{GS}=0V, T_J=150^\circ\text{C}$	---	---	100	$\mu A$
Gate-Source Leakage Current	$I_{GSS}$	$V_{GS}=\pm 30V, V_{DS}=0V$	---	---	$\pm 100$	nA
Gate Resistance	$R_g$	$V_{DS}=0V, V_{GS}=0V, f=1MHz$	---	1.94	---	$\Omega$
Total Gate Charge	$Q_g$	$V_{DD}=480V, V_{GS}=10V, I_D=72A$	---	140	---	nC
Gate-Source Charge	$Q_{gs}$		---	27	---	
Gate-Drain Charge	$Q_{gd}$		---	41	---	
Turn-On Delay Time	$T_{d(on)}$	$V_{DD}=400V, R_G=1.9\Omega, I_D=44.4A, V_{GS}=13V$	---	22	---	ns
Rise Time	$T_r$		---	10	---	
Turn-Off Delay Time	$T_{d(off)}$		---	120	---	
Fall Time	$T_f$		---	8	---	
Input Capacitance	$C_{iss}$	$V_{DS}=50V, V_{GS}=0V, f=1MHz$	---	7360	---	pF
Output Capacitance	$C_{oss}$		---	790	---	
Reverse Transfer Capacitance	$C_{rss}$		---	30	---	

**Drain-Source Diode Characteristics**


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Continuous Source Current	$I_S$	$T_C=25^\circ\text{C}$	---	---	72	A
Pulsed Source Current	$I_{SM}$		---	---	216	A
Diode Forward Voltage	$V_{SD}$	$V_G=0V, I_S=72A, T_J=25^\circ\text{C}$	---	0.9	1.2	V
Reverse Recovery Time	$t_{rr}$	$V_R=400V, I_F=44.4A, di_F/dt=100A/\mu s$	---	652	---	ns
Reverse Recovery Charge	$Q_{rr}$		---	11.8	---	$\mu C$
Peak Reverse Recovery Current	$I_{rrm}$		---	31	---	A

**Note:**


- Limited by  $T_{J,max}$ . Maximum Duty Cycle  $D = 0.50$
- Pulse width  $t_p$  limited by  $T_{J,max}$
- Identical low side and high side switch with identical  $R_G$
- $V_{DD}=50V, R_G=25\Omega, I_{AS}=15A$ , Starting  $T_J=25^\circ\text{C}$

**Typical Characteristics**


**Figure 1. Output Characteristics**

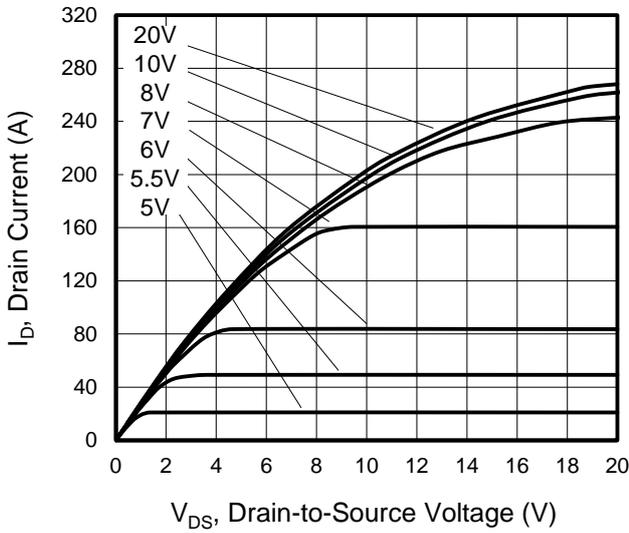


**Figure 2. Transfer Characteristics**

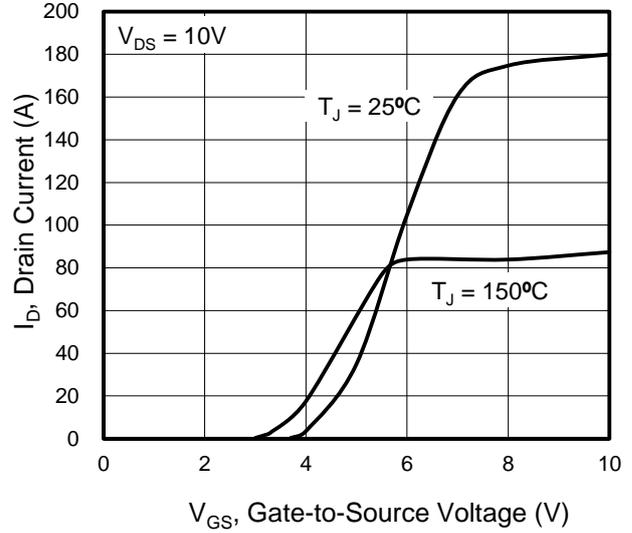


**Figure 3. On-Resistance vs. Drain Current**

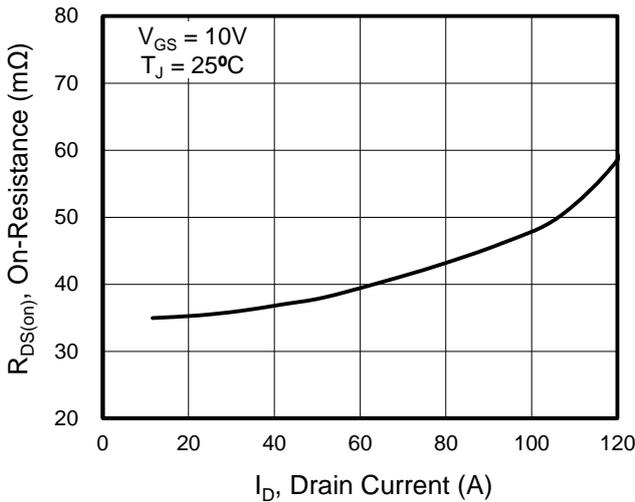


**Figure 4. Capacitance**

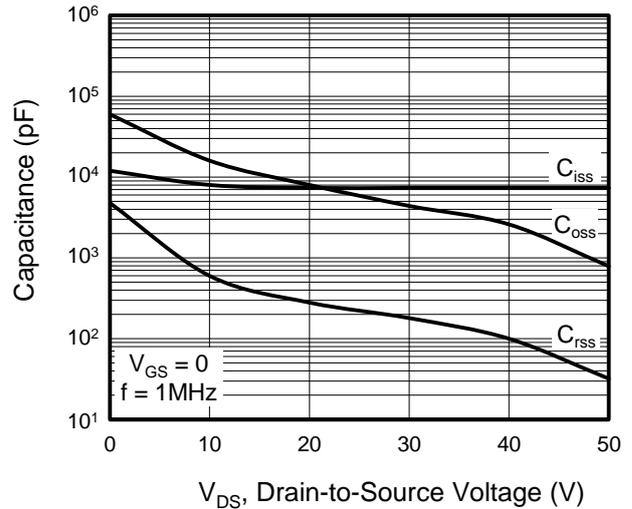


**Figure 5. Gate Charge**

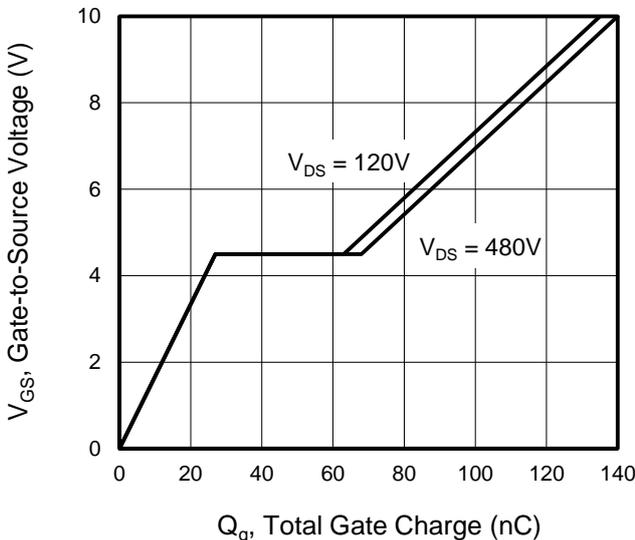


**Figure 6. Body Diode Forward Voltage**

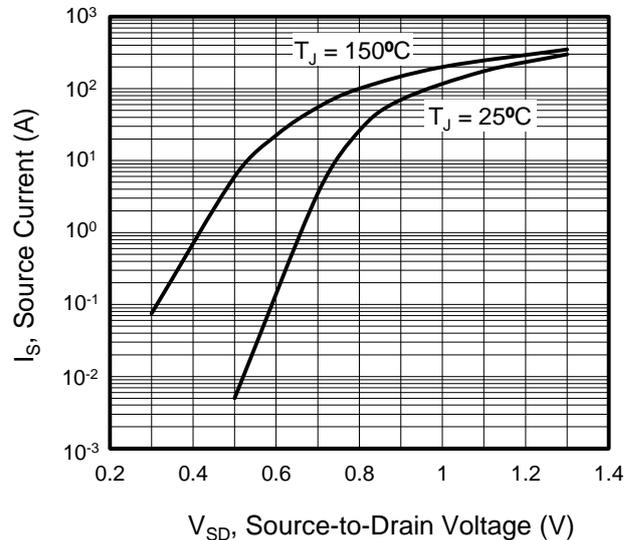


**Figure 7. On-Resistance vs. Temperature**

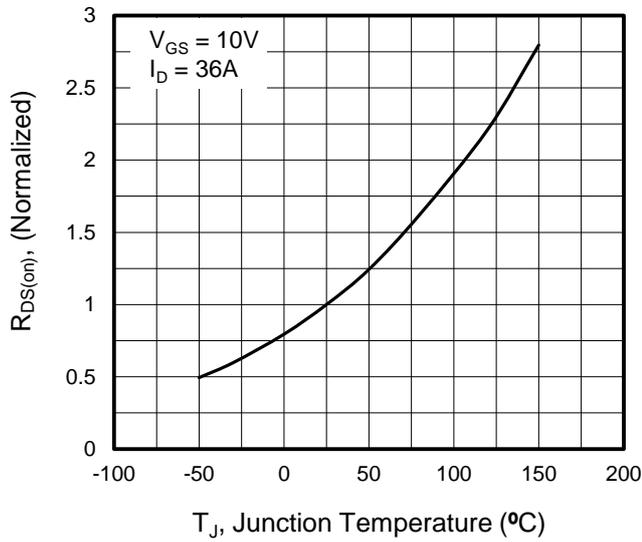


**Figure 8. Threshold Voltage vs. Temperature**

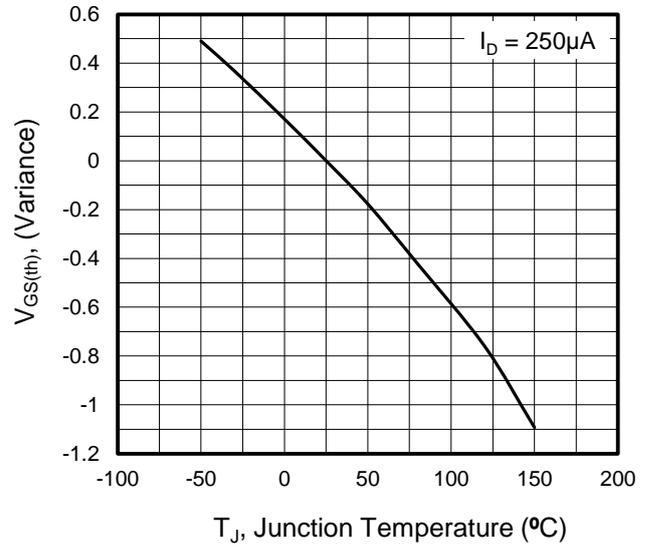

**Figure 9. Transient Thermal Impedance**

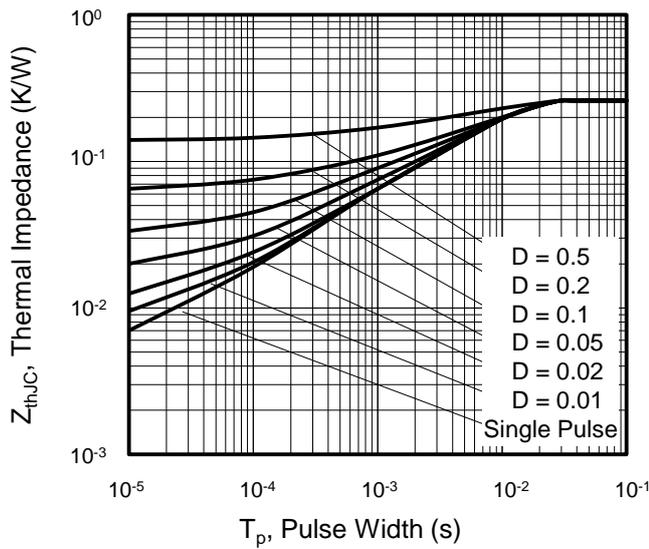

**TO-247 Package Outline Dimensions**

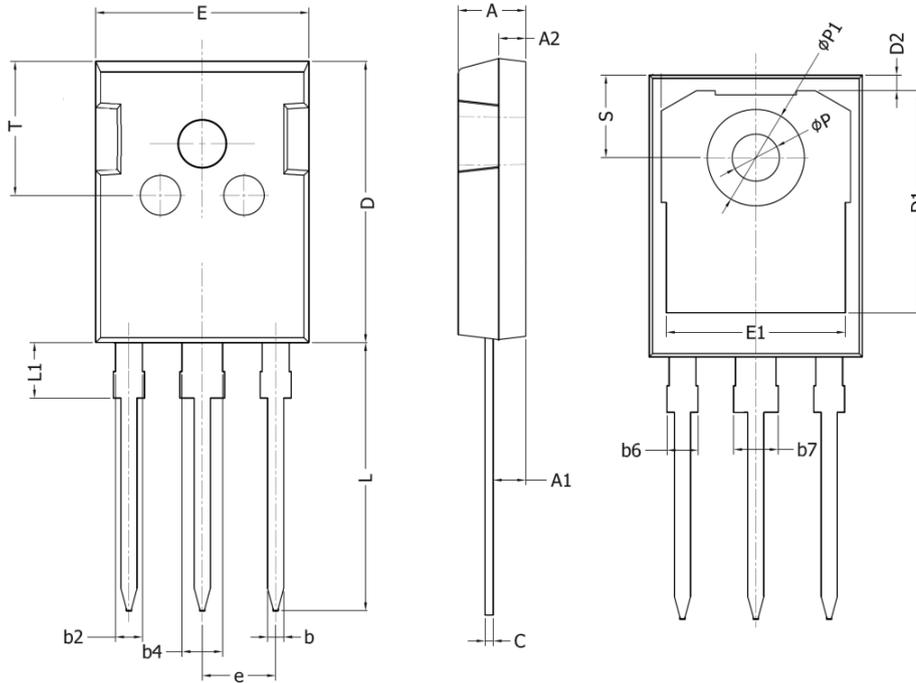

Symbol	Dimensions In Millimeters	
	Min.	Max.
A	4.90	5.20
A1	2.31	2.51
A2	1.9	2.1
b	1.16	1.26
b2	1.96	2.06
b4	2.96	3.06
b6	-	2.25
b7	-	3.25
C	0.59	0.66
D	20.90	21.20
D1	16.25	16.85
D2	1.05	1.35
E	15.75	16.10
E1	13.00	13.60
e	5.436 BSC	
L	19.80	20.20
L1	-	4.30
P	3.40	3.60
P1	7.00	7.40
S	6.05	6.25
T	9.80	10.20