

**Features**

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- Green Device Available


**Product Summary**



$V_{DS}$	100	V
$I_D$	3	A
$R_{DS(ON)}$ (at $V_{GS}=10V$ )	330	m $\Omega$
$R_{DS(ON)}$ (at $V_{GS}=4.5V$ )	360	m $\Omega$

**Applications**

- High Frequency Point-of-Load, Synchronous Buck Converter
- Networking DC-DC Power System
- Load Switch

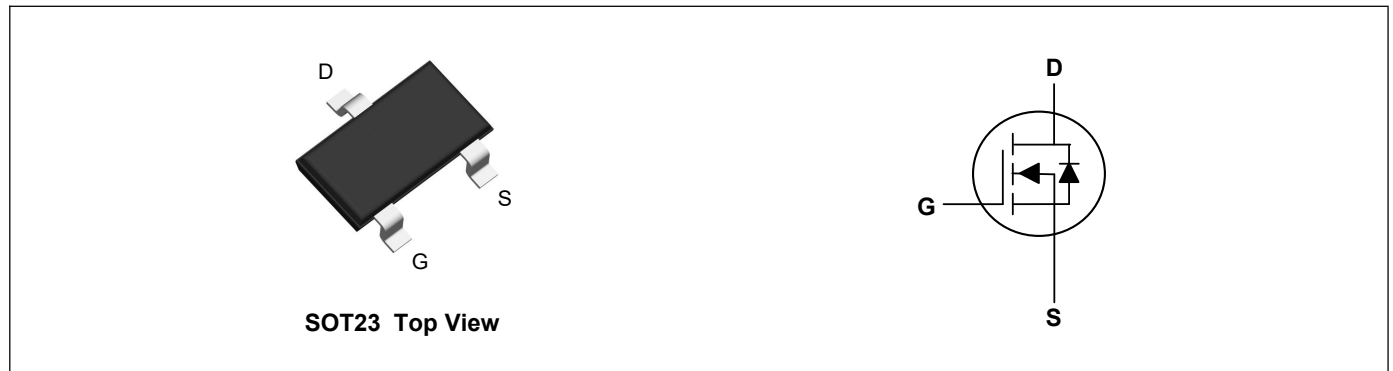

**Absolute Maximum Ratings( $T_A=25^{\circ}C$ , unless otherwise noted)**

Parameter	Symbol	Rating	Units
Drain-Source Voltage	$V_{DS}$	100	V
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Continuous Drain Current <sup>1</sup>	$I_D$	3	A
Pulsed Drain Current <sup>2</sup>	$I_{DM}$	12	A
Total Power Dissipation <sup>4</sup>	$P_D$	1.25	W
Storage Temperature Range	$T_{STG}$	-55 to 150	$^{\circ}C$
Operating Junction Temperature Range	$T_J$	-55 to 150	$^{\circ}C$

**Thermal Characteristics**

Parameter	Symbol	Typ	Max	Unit
Thermal Resistance Junction-Ambient <sup>1</sup>	$R_{\theta JA}$	---	150	$^{\circ}C/W$

**Electrical Characteristics ( $T_J=25^\circ\text{C}$ , unless otherwise noted)**

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V, I_D=250\mu A$	100	---	---	V
Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=3A$	---	280	330	$m\Omega$
		$V_{GS}=4.5V, I_D=1.5A$	---	300	360	$m\Omega$
Gate Threshold Voltage	$V_{GS(th)}$	$V_{GS}=V_{DS}, I_D=250\mu A$	1.5	---	3.5	V
Drain-Source Leakage Current	$I_{DSS}$	$V_{DS}=100V, V_{GS}=0V, T_J=25^\circ\text{C}$	---	---	1	$\mu A$
Gate-Source Leakage Current	$I_{GSS}$	$V_{GS}=\pm 20V, V_{DS}=0V$	---	---	$\pm 100$	nA
Total Gate Charge	$Q_g$	$V_{DS}=50V, V_{GS}=10V, I_D=1.5A$	---	10	---	nC
Gate-Source Charge	$Q_{gs}$		---	5	---	
Gate-Drain Charge	$Q_{gd}$		---	3.2	---	
Turn-On Delay Time	$T_{d(on)}$	$V_{DS}=50V, V_{GS}=10V, R_G=1\Omega, I_D=1.5A$	---	7	---	ns
Rise Time	$T_r$		---	15	---	
Turn-Off Delay Time	$T_{d(off)}$		---	10	---	
Fall Time	$T_f$		---	11	---	
Input Capacitance	$C_{iss}$	$V_{DS}=50V, V_{GS}=0V, f=1\text{MHz}$	---	820	---	pF
Output Capacitance	$C_{oss}$		---	40	---	
Reverse Transfer Capacitance	$C_{rss}$		---	25	---	

**Drain-Source Diode Characteristics**


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Diode Forward Voltage <sup>2</sup>	$V_{SD}$	$V_{GS}=0V, I_S=1A, T_J=25^\circ\text{C}$	---	0.8	1.2	V

**Note:**


1. The data tested by surface mounted on a 1 inch<sup>2</sup> FR-4 board with 2OZ copper.
2. The data tested by pulsed, pulse width  $\leq 300\mu s$ , duty cycle  $\leq 2\%$
3. The power dissipation is limited by 150°C junction temperature

**Typical Characteristics**


Typical Output Characteristics

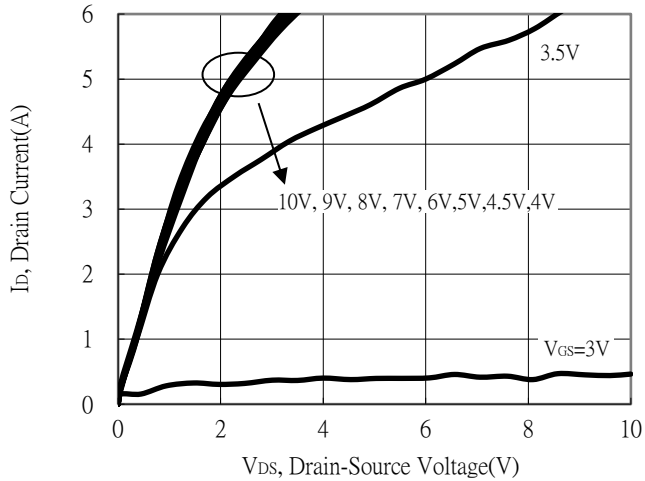


Breakdown Voltage vs Ambient Temperature

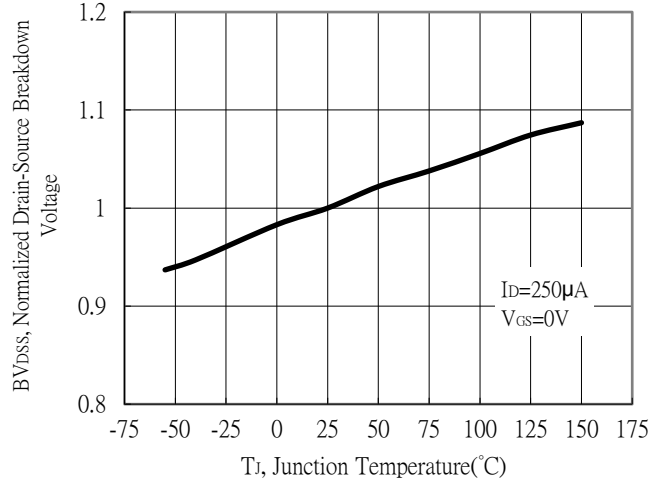


Static Drain-Source On-State resistance vs Drain Current

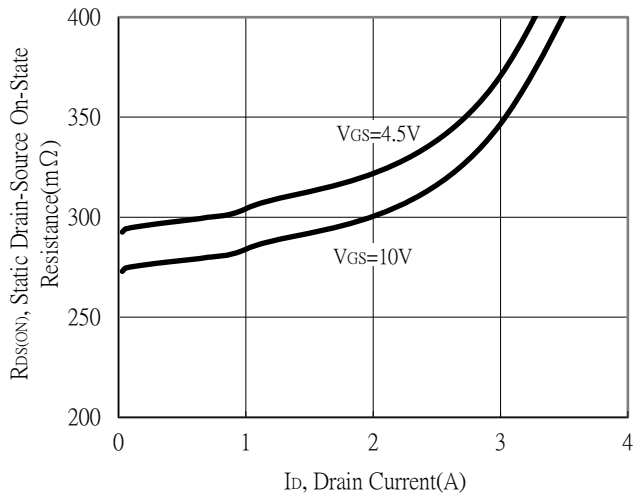


Body Diode Current vs Source-Drain Voltage

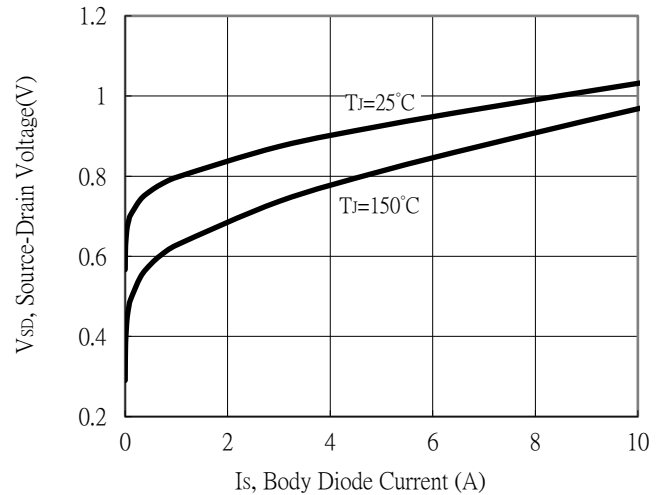


Static Drain-Source On-State Resistance vs Gate-Source Voltage

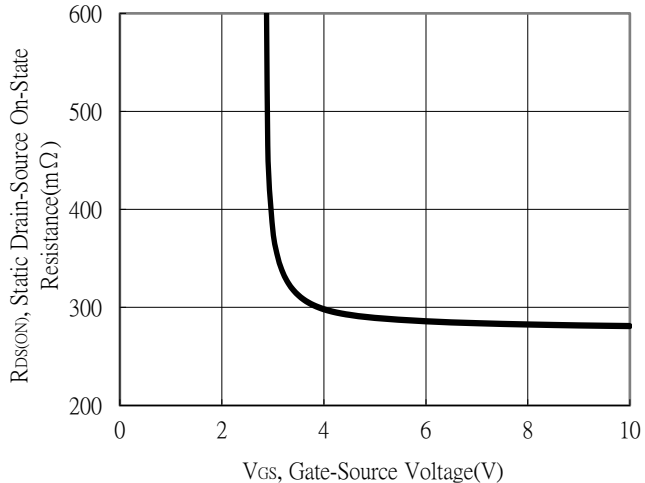


Gate Charge Characteristics

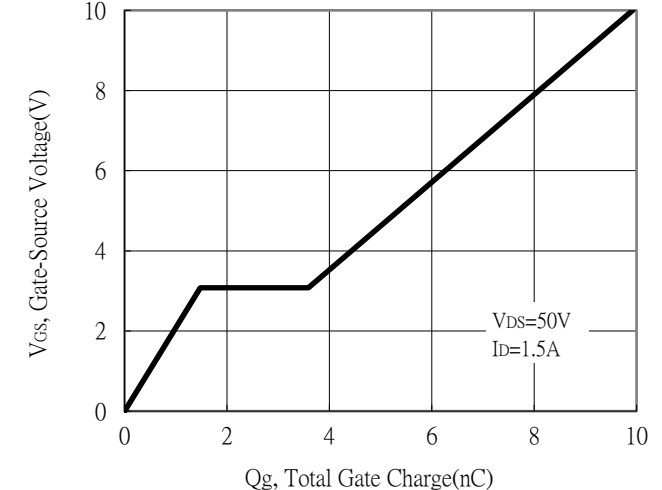


Capacitance vs Drain-to-Source Voltage

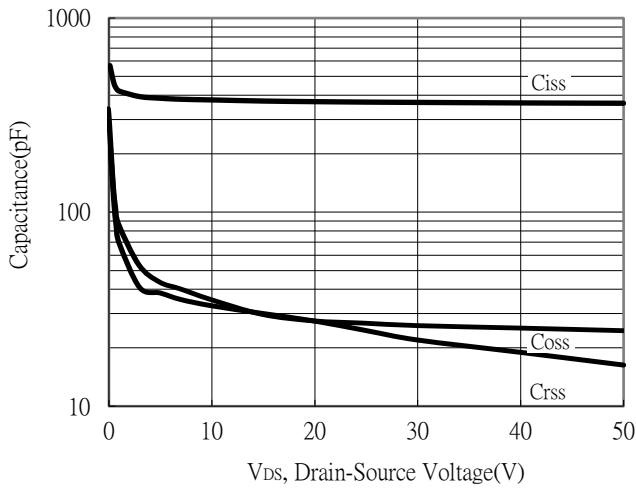


Maximum Safe Operating Area

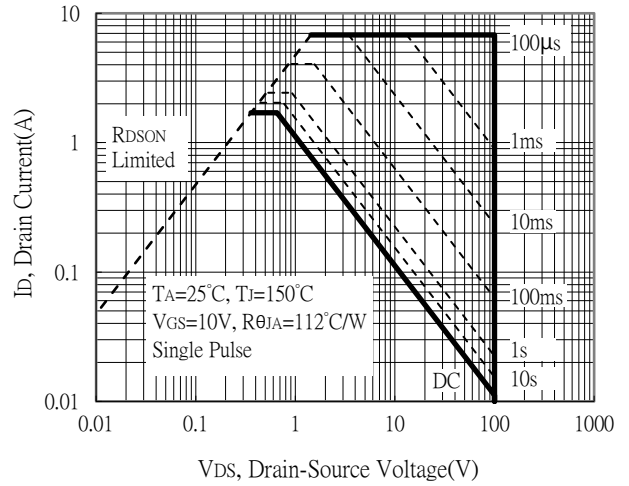

Transient Thermal Response Curves

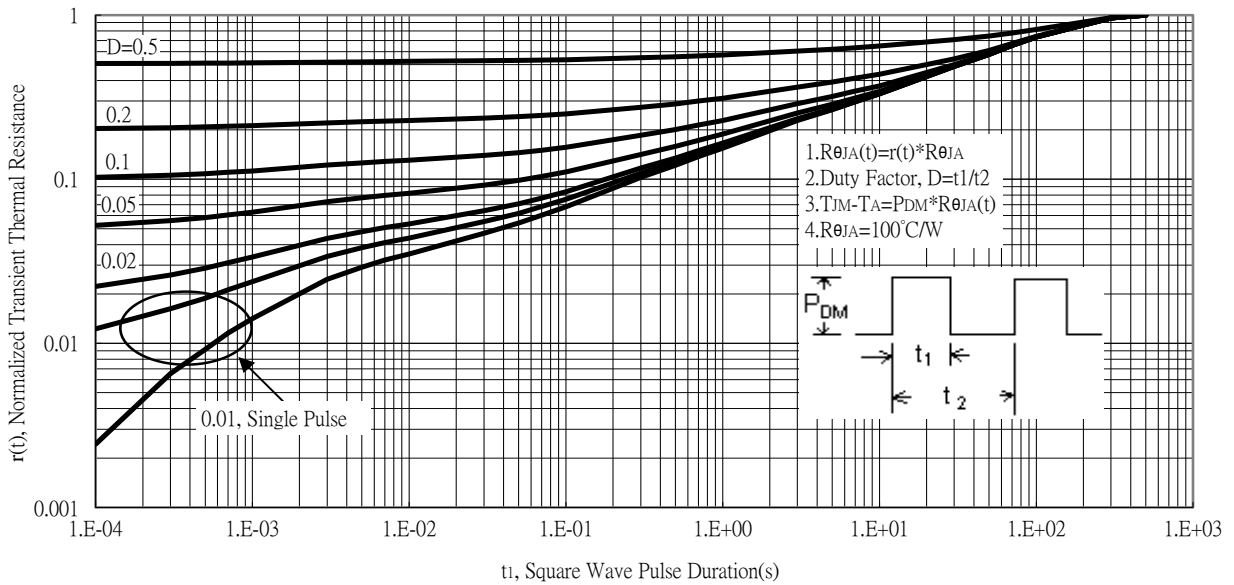

**SOT23 Package Outline Dimensions**

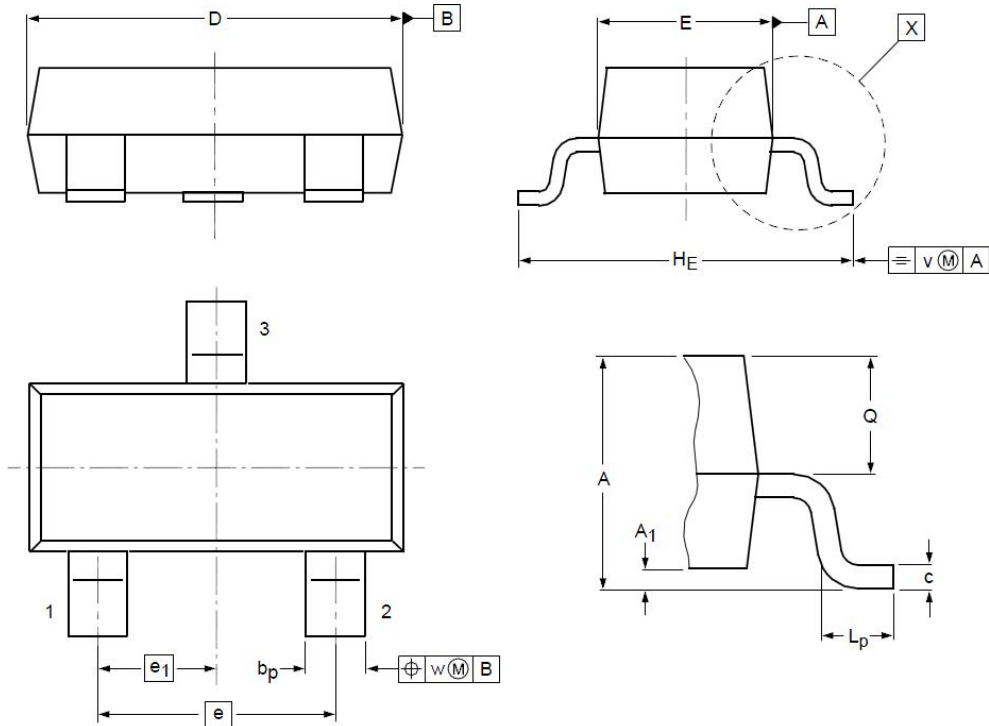

Symbol	Dimensions (unit:mm)			Symbol	Dimensions (unit:mm)		
	Min	Typ	Max		Min	Typ	Max
<b>A</b>	0.90	1.05	1.20	<b>e<sub>1</sub></b>	--	0.95	--
<b>A<sub>1</sub></b>	0.01	0.05	0.10	<b>H<sub>E</sub></b>	2.10	2.40	2.50
<b>b<sub>p</sub></b>	0.38	0.42	0.48	<b>L<sub>p</sub></b>	0.40	0.50	0.60
<b>c</b>	0.09	0.13	0.15	<b>Q</b>	0.45	0.49	0.55
<b>D</b>	2.80	2.92	3.00	<b>V</b>	--	0.20	--
<b>E</b>	1.20	1.33	1.40	<b>W</b>	--	0.10	--
<b>e</b>	--	1.90	--				