

Features

- Low drain-source on-resistance: $R_{DS(ON)}=0.10\Omega$ (typ)
- Easy to control gate switching
- Enhancement mode: $V_{th} = 2.0$ to $4.0V$
- 100% avalanche tested
- RoHS compliant


Key Performance Parameters




Parameter	Value	Unit
$V_{DS} @ T_{j,max}$	650	V
$R_{DS(ON),max}$	130	mΩ
I_D	25	A
$Q_{g,typ}$	55	nC
I_{DM}	75	A

Applications

- Switch Mode Power Supply (SMPS)
- TV power & LED Lighting Power
- AC to DC Converters
- Telecom

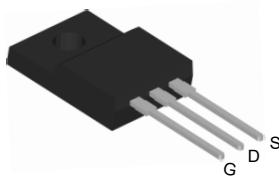

TO-220F Top View

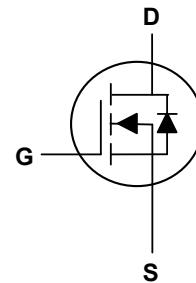

Absolute Maximum Ratings($T_c=25^\circ C$, unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	650	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ¹	$I_D @ T_c=25^\circ C$	25	A
Continuous Drain Current ¹	$I_D @ T_c=100^\circ C$	15.8	A
Pulsed Drain Current ²	I_{DM}	75	A
Single Pulse Avalanche Energy ⁴	EAS	454	mJ
Avalanche Current	I_{AS}	3.1	A
MOSFET dv/dt ruggedness, $V_{DS} = 0...400V$	dv/dt	50	V/ns
Reverse diode dv/dt ³ $V_{DS}=0...400V$, $I_{SD} \leq I_D$		15	
Total Power Dissipation ($T_c=25^\circ C$)	P_D	34	W
Storage Temperature Range	T_{STG}	-55 to 150	°C
Operating Junction Temperature Range	T_J	-55 to 150	°C

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance Junction-Ambient (Max)	$R_{\theta JA}$	80	°C/W
Thermal Resistance Junction-Case (Max)	$R_{\theta JC}$	3.65	°C/W

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=1\text{mA}$	650	---	---	V
Static Drain-Source On-Resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=10.2\text{A}$	---	100	130	$\text{m}\Omega$
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}}=V_{\text{DS}}, I_{\text{D}}=1.1\text{mA}$	2.0	---	4.0	V
Drain-Source Leakage Current	I_{DSS}	$V_{\text{DS}}=650\text{V}, V_{\text{GS}}=0\text{V}, T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{\text{DS}}=650\text{V}, V_{\text{GS}}=0\text{V}, T_J=150^\circ\text{C}$	---	---	100	μA
Gate-Source Leakage Current	I_{GSS}	$V_{\text{GS}}=\pm 20\text{V}, V_{\text{DS}}=0\text{V}$	---	---	± 1	μA
Total Gate Charge	Q_g	$V_{\text{DD}}=520\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=14.3\text{A}$	---	55	---	nC
Gate-Source Charge	Q_{gs}		---	12	---	
Gate-Drain Charge	Q_{gd}		---	19	---	
Turn-On Delay Time	$T_{\text{d}(\text{on})}$	$V_{\text{DD}}=325\text{V}, R_{\text{G}}=25\Omega, I_{\text{D}}=14.3\text{A}$	---	56	---	ns
Rise Time	T_r		---	31	---	
Turn-Off Delay Time	$T_{\text{d}(\text{off})}$		---	250	---	
Fall Time	T_f		---	20	---	
Input Capacitance	C_{iss}	$V_{\text{DS}}=400\text{V}, V_{\text{GS}}=0\text{V}, f=1\text{MHz}$	---	2240	---	pF
Output Capacitance	C_{oss}		---	60	---	
Reverse Transfer Capacitance	C_{rss}		---	3.8	---	

Drain-Source Diode Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Continuous Source Current	I_s	$T_c=25^\circ\text{C}$	---	---	25	A
Pulsed Source Current	I_{SM}		---	---	75	A
Diode Forward Voltage	V_{SD}	$V_{\text{G}}=0\text{V}, I_{\text{s}}=14.3\text{A}, T_J=25^\circ\text{C}$	---	---	1.3	V
Reverse Recovery Time	t_{rr}	$V_R=400\text{V}, I_F=14.3\text{A}, \frac{di_F}{dt}=100\text{A}/\mu\text{s}$	---	450	---	ns
Reverse Recovery Charge	Q_{rr}		---	7.8	---	μC

Note:

1. Limited by $T_{j,\text{max}}$. Maximum Duty Cycle D = 0.50
2. Pulse width t_p limited by $T_{j,\text{max}}$
3. Identical low side and high side switch with identical R_G
4. $V_{\text{DD}}=100\text{V}, R_G=25\Omega, I_{\text{AS}}=3.1\text{A}$

Hnd]WU 7\ UF UWYf]ghWg

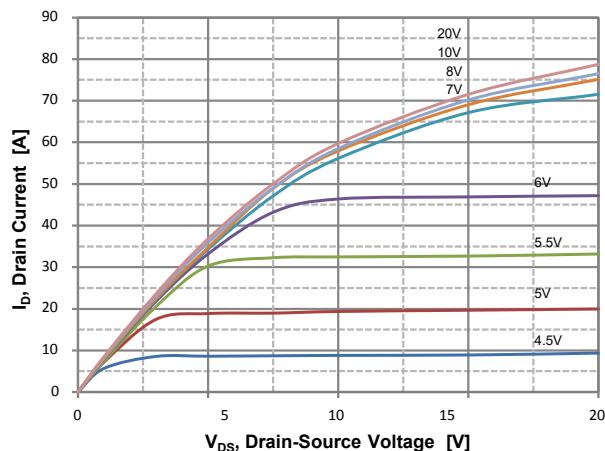


Figure 1. On Region Characteristics

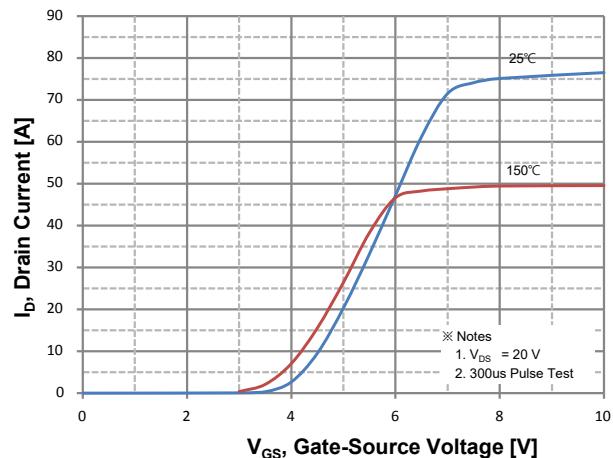


Figure 2. Transfer Characteristics

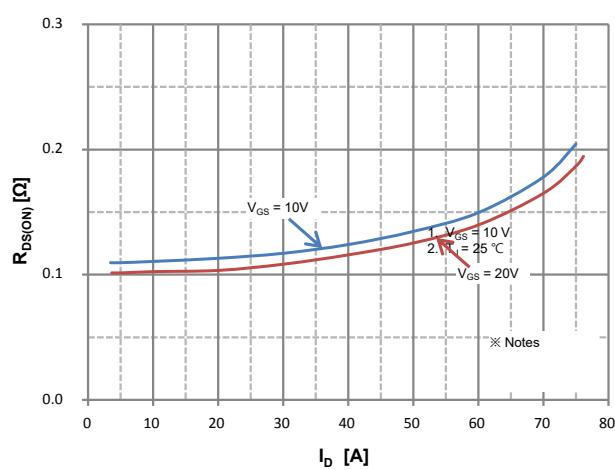


Figure 3. On Resistance Variation vs Drain Current and Gate Voltage

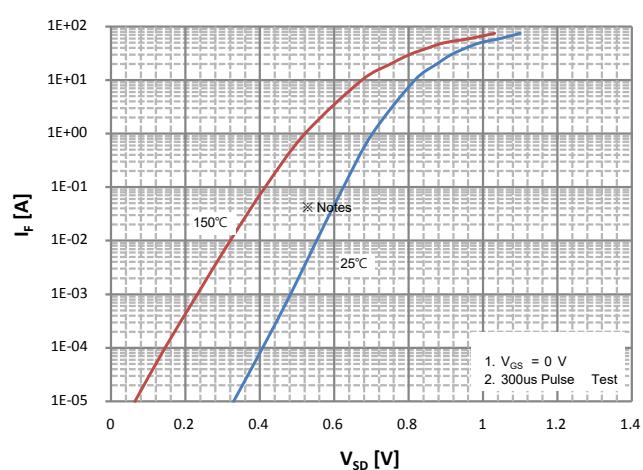


Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature

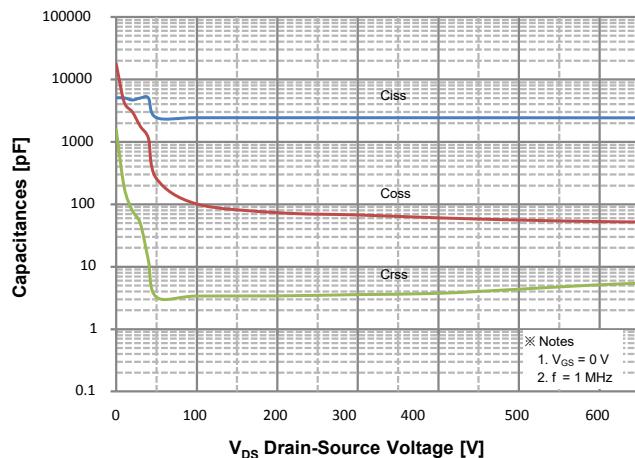


Figure 5. Capacitance Characteristics

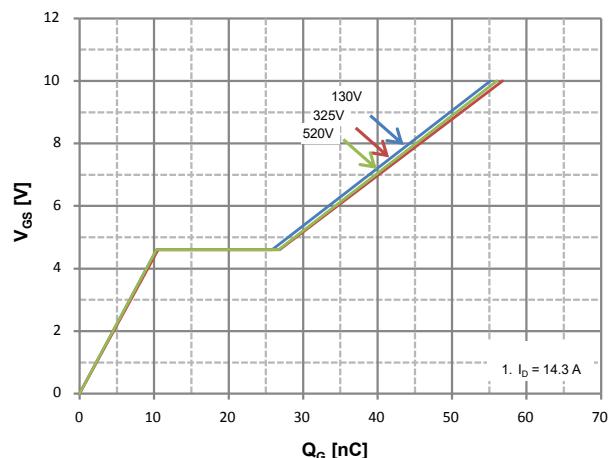
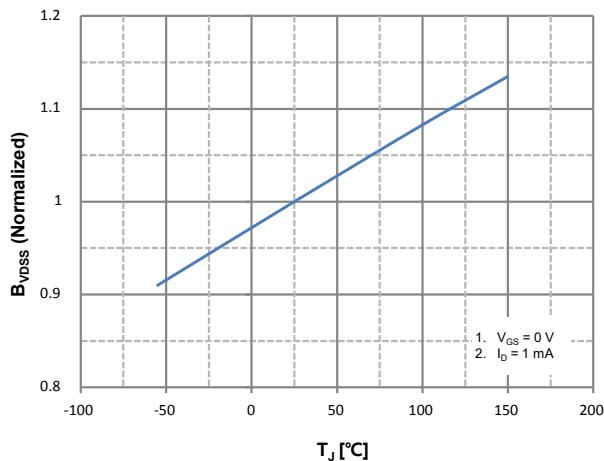
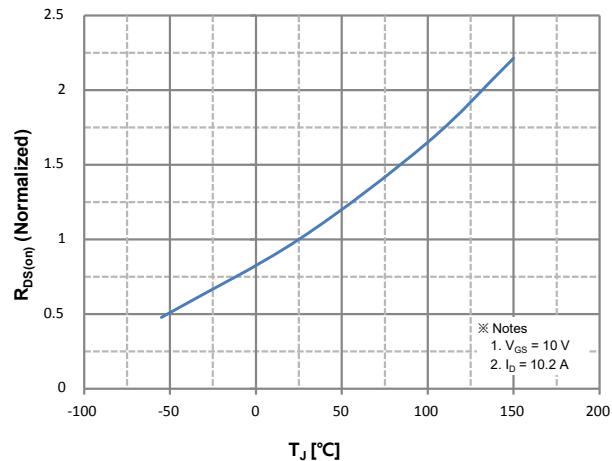


Figure 6. Gate Charge Characteristics



**Figure 7. Breakdown Voltage Variation
vs. Temperature**



**Figure 8. On-Resistance Variation
vs. Temperature**

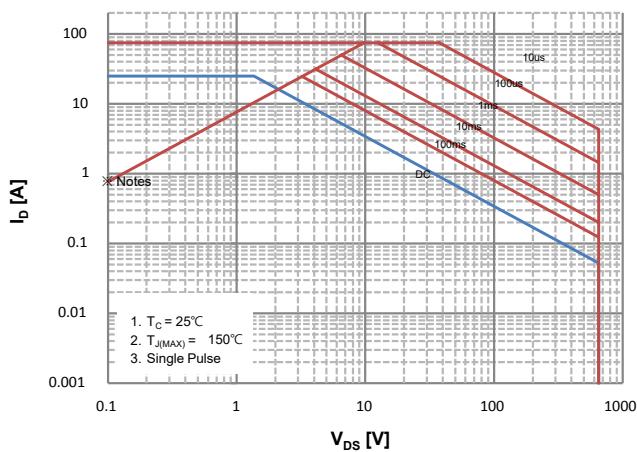
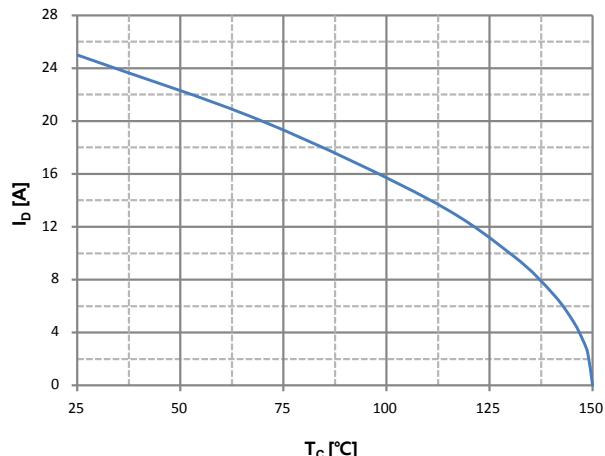


Figure 9. Maximum Safe Operating Area



**Figure 10. Maximum Drain Current
vs. Case Temperature**


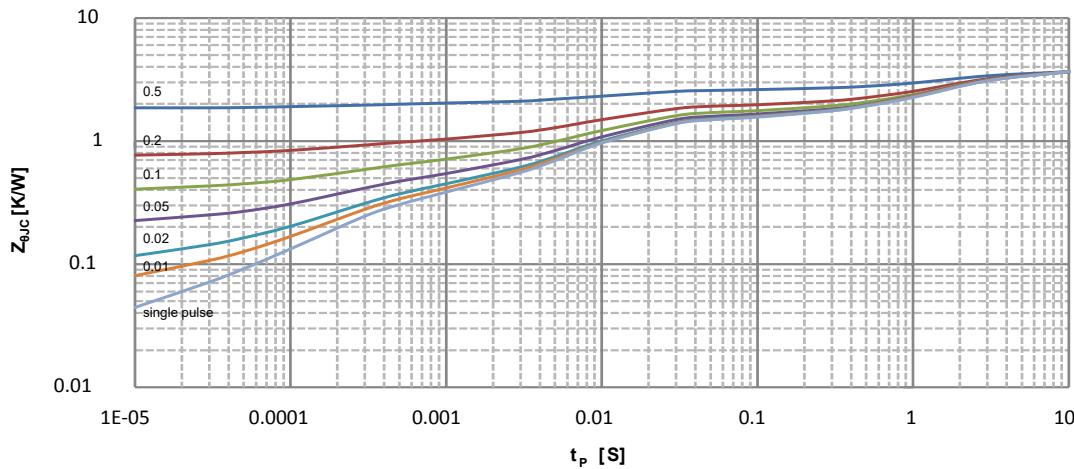


Figure 11. Transient Thermal Response Curve

TO-220F Package Outline Dimensions

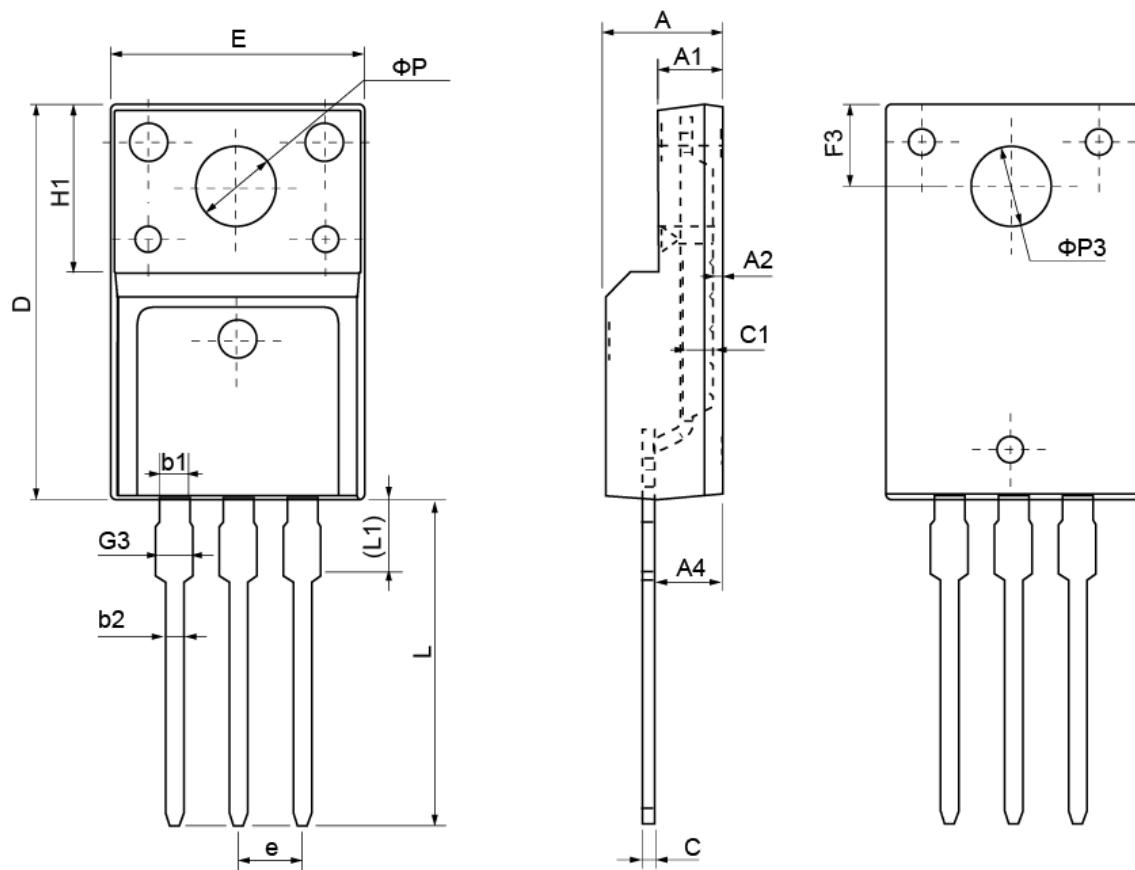

Symbol	Dimensions (unit:mm)			Symbol	Dimensions (unit:mm)		
	Min	Typ	Max		Min	Typ	Max
A	4.40	4.70	5.00	H1	6.70 REF		
A1	2.30	2.55	2.80	L	12.30	12.98	13.30
A2	0.30	0.50	0.70	L1	2.95	3.10	3.50
A4	2.45	2.80	3.05	φ P	3.03	3.20	3.50
c	0.30	0.50	0.70	φ P3	3.15	3.45	3.65
c1	1.20	1.30	1.40	b1	1.10	1.30	1.45
D	15.40	15.90	16.40	b2	0.60	0.80	1.00
E	9.86	10.16	10.46	F3	3.05	3.30	3.55
e	2.54 BSC			G3	1.15	1.35	1.55